


ASSEMBLY INSTRUCTIONS

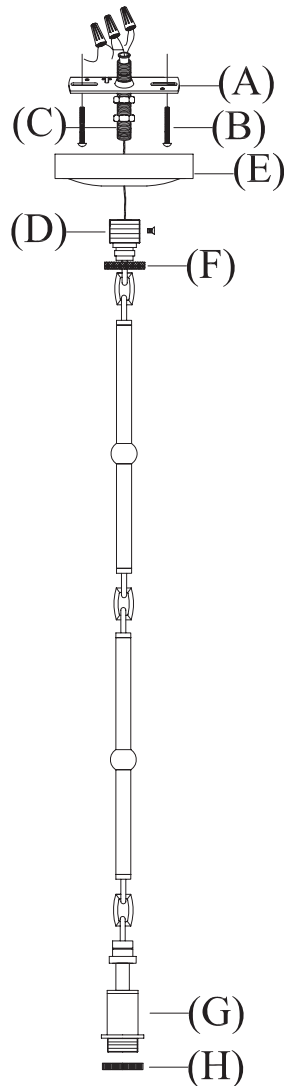

Goodman Petite Hanging Shade

Item # TOB5089

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.

WARNING * SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.**

INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT, DO NOT INSTALL.

ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.

1. Remove socket ring (H) from socket (G) by unscrewing socket ring (H).
2. Attach shade (not included) onto the threaded section of socket (G) and secure with socket ring (H).
3. Unscrew canopy ring (F), slide canopy ring (F) and canopy (E) on lamp pole.
4. Attach mounting strap (A) to ceiling outlet box and secure with mounting screws (B).
5. Insert top thread nipple (C) in mounting strap (A).
6. Attach chain mounting loop (D) to thread nipple (C).
7. Attach the ground wire (bare wire) from the fixture to the ground junction box wire (usually green or copper wire). Fasten together with a plastic wire connector and wrap the connection with electrical tape. Be sure no wire strands are exposed.
8. Connect the neutral wire from the fixture (ridged molded wire) to the neutral wire from the junction box (usually white). Fasten together with a plastic wire connector and wrap the connection with electrical tape. Be sure no wire strands are exposed.
9. Connect the hot wire from the fixture (smooth wire) to the hot wire (usually black) from the junction box. Fasten each together with a plastic wire connector and wrap the connection with electrical tape. Be sure that no wire strands are exposed.

DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS
OTHERWISE SAFETY WILL BE COMPROMISED.



ASSEMBLY INSTRUCTIONS

Goodman Petite Hanging Shade


Item # TOB5089

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.

WARNING * SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.**

INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT, DO NOT INSTALL.

ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.

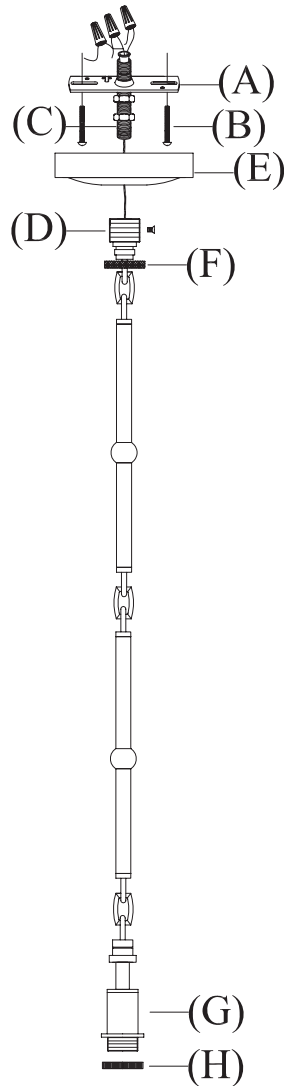

10. Tuck the wire connections neatly into the ceiling outlet box.

11. Slip canopy (E) to ceiling and secure with threaded canopy ring (F).

12. Insert light bulb (not included) into the socket.

13. Restore power and test fixture.

