

# Assembly Instructions: 5907-LP (Bradley)

## IMPORTANT:

- ALL INSTALLATION WORK SHOULD BE DONE BY ACCREDITED PROFESSIONAL.
- SHUT OFF POWER SUPPLY AT FUSE OR CIRCUIT BREAKER!
- USE ONLY THE SPECIFIED BULBS. DO NOT EXCEED THE MAXIMUM WATTAGE!

For Customer Service, contact the place of purchase.

## PREPARING FOR INSTALLATION

Carefully remove all of the contents from the carton. See the important notes above. Shut off the power at the circuit breaker and completely remove the old fixture from the ceiling, including the old mounting strap.

From the parts bag remove the mounting strap assembly. Mounting strap (B) contains holes. Two of mounting screws (A) should be attached to mounting strap (B). You may need to tighten nuts (C) that hold these screws in place. Place mounting strap (B) over the junction box so that mounting screws (A) are vertical, and in alignment with the locations of the holes on the canopy. Secure mounting strap (B) to the junction box with mounting screws (D) and a screwdriver. Tighten the screws securely.

## ASSEMBLING THE FIXTURE



Twist threaded rods (O) into posts (Q) of the fixture's body at nipples (P). Cover with rods (M) and lock in place with washers (P), spacers (O), hex nuts (N) and flat washers (I). Top loops (H) is on the wires, but not attached. Twist top loops (H) onto the exposed threads (N) of threaded rod (O).

By measuring, determine the correct number of chain links needed for proper hanging height. If necessary, use a pair of pliers to open and remove any excess chain. Attach chain connectors (G) to each end of chains (F) before attaching one end of the chain connector/chain to top loops (H). Close the chain connectors. Connect the other ends of chains (F) to the canopy by attaching chain connectors (G) to canopy loops (E). Feed the fixture's wires up through one of top loops (H) then through chain (F) (every three links or so). Pull the wires until taut. Pass the wires through the hole at the center of the canopy.

## CONNECTING THE WIRES

Have an assistant support the fixture's weight while completing the wiring. Cut away excess wire. Attach the fixture's wires to the power supply wires from the junction box. Connect black to smooth/black/transparent (L) wire; white to ribbed/white/transparent (N) wire; ground to ground (green or copper).

Twist the ends of the wire pairs together, and then twist on a wire connector. Make sure all twists are in the same direction. If there is no ground wire (green or copper) from the junction box, locate the ground screw on mounting strap (B) and wrap the fixture's ground wire around the green ground screw. Use a screwdriver to secure the ground screw onto the mounting bracket/mounting strap. Tuck all wires.

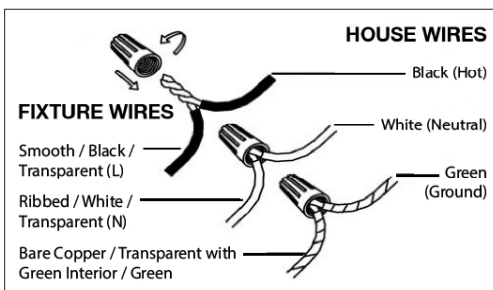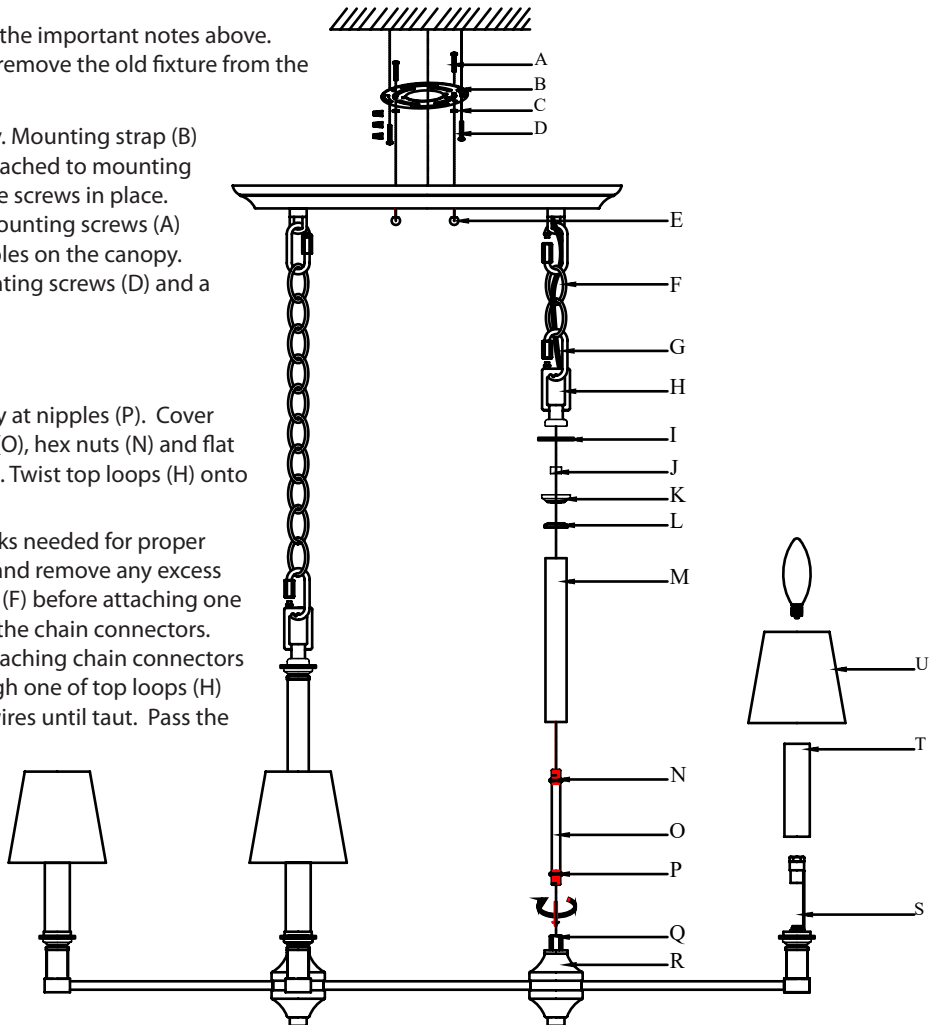

## FINISHING THE INSTALLATION

Push the canopy up to the ceiling. Tightly thread decorative nuts (E) onto the threads of mounting screws (A) to secure the canopy in place.

Slide candle sleeves (T) over sockets (S). If you are installing metal shades (U), gently push the shades (U) over candle sleeves (T) before installing light bulbs (not provided) in accordance with the fixture's specifications. Otherwise, simply install bulbs. Do not exceed the maximum recommended wattage.

Your installation is complete. Turn on the power and test the fixture.

## CLEANING TIPS

Treat the fixture gently! Regular cleaning will reduce the need for deep cleaning. For regular cleaning, turn off the light and wipe down the fixture with a clean lint-free cotton or microfiber cloth. Never spray cleaner directly onto the fixture.