



ASSEMBLY AND INSTALLATION INSTRUCTIONS

T0377

WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER BEFORE INSTALLING OR SERVICING THIS FIXTURE.

NOTES: 1. Before installing, consult local electrical codes for wiring and grounding requirements.
2. READ AND SAVE THESE INSTRUCTIONS.

Warning: LED electronics can be damaged by electro static discharge (ESD) shock. Before installation, discharge yourself by touching a grounded bare metal surface to remove this hazard. To avoid damage, do not touch the LED module.

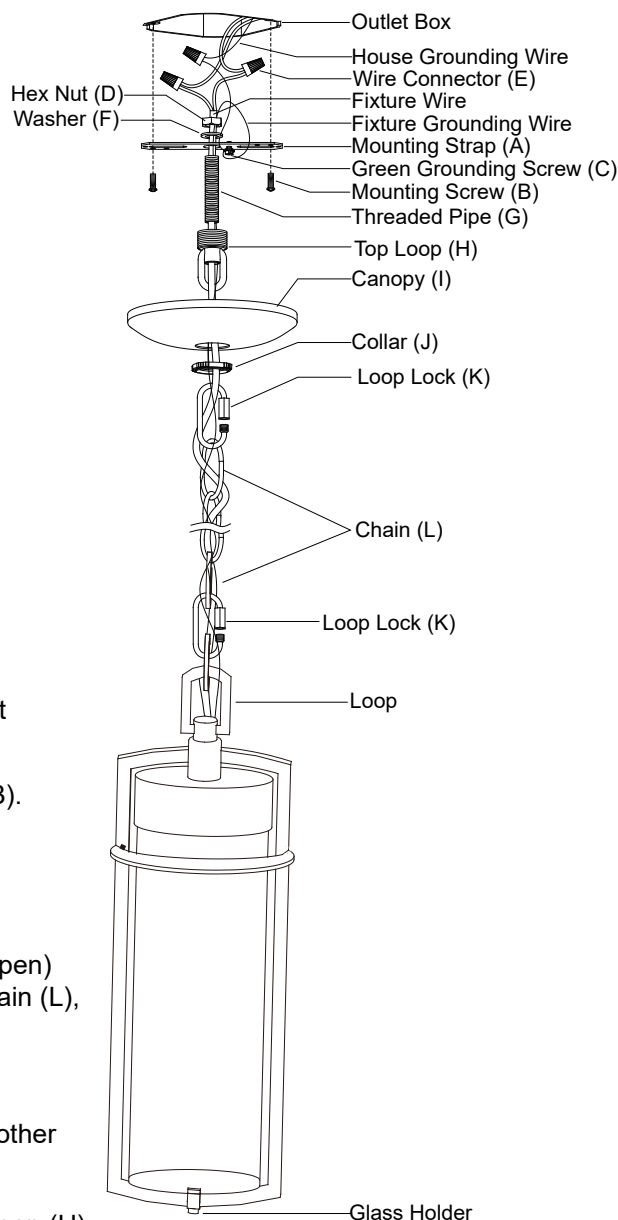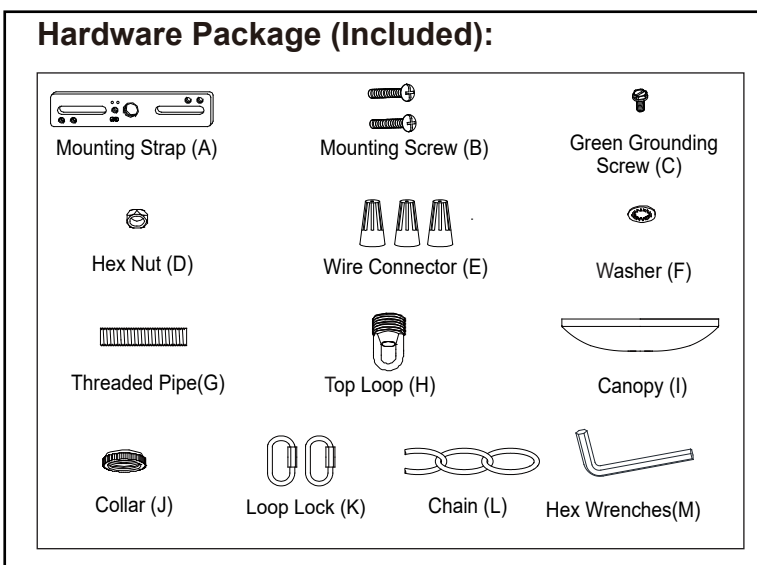

Installation Steps

Turn off the power at fuse or circuit box
















1. Attach the threaded pipe to the mounting strap (A), and then secure it with a washer and a hex nut (D).
2. Attach mounting strap (A) to outlet box using two mounting screws (B).
3. Secure the top loop (H) to the threaded pipe (G).
4. Connect the chain (L):
 - Determine length of needed chain to achieve desired fixture height. (To remove excess chain section, use pliers to bend link open)
 - Weave the fixture wires and fixture grounding wire through the chain (L), collar (J) and canopy (I).
5. Connect one end of the chain (L) to the loop using a loop lock (K).
6. Connect the other end of the chain (J) to the top loop (H) using the other loop lock (K).
7. Thread the fixture wires and fixture grounding wire through the top loop (H), threaded pipe (G) and mounting strap (A).
8. Pull out the source wires from the outlet box. Make wire connections using wire connectors as follows:
 - Connect the smooth-coated wire (marked) from the fixture to the black wire from the power source.
 - Connect the ribbed-coated wire (unmarked) from the fixture to the white wire from the power source.
 - Attach the fixture grounding wire to the mounting strap with the green grounding screw, and then connect it to the house grounding wire with a wire connector (E).
 Carefully put the wires back into the outlet box.


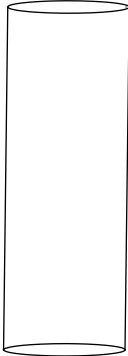
9. Attach the canopy to the mounting strap by inserting the top loop, and then secure it with the collar.
10. Loosen glass holder use hex wrenches(M), after change the glass, secure the glass holder by hex wrenches(M) again.

Turn on the power at fuse or circuit box

The following parts are available for re-order if damaged or missing.

Spare Parts List:

 Mounting Strap (A)	 Mounting Screw (B)	 Green Grounding Screw (C)	 Mounting Hardware 5822MM(1 SET)	 Glass 9945CS
 Hex Nut (D)	 Wire Connector (E)	 Washer (F)		
 Threaded Pipe (G)	 Top Loop (H)	 Canopy (I)		
 Collar (J)	 Loop Lock (K)	 Chain (L)		
		 Hex Wrenches (M)		

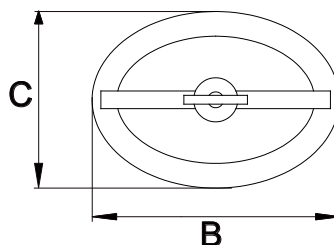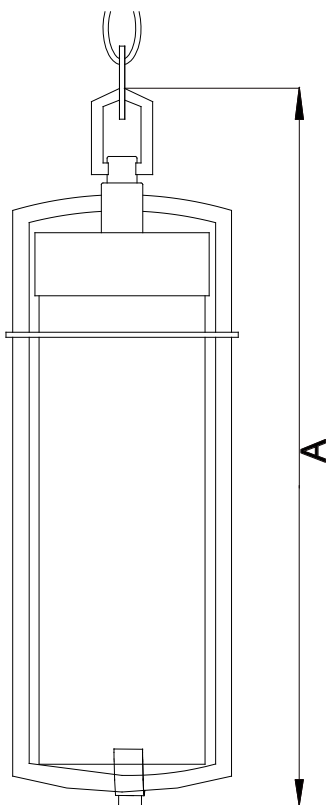

A: 16-3/4"
 B: 5-1/2"
 C: 4"